



MITSUBISHI TRITON (RHD) 2020 +

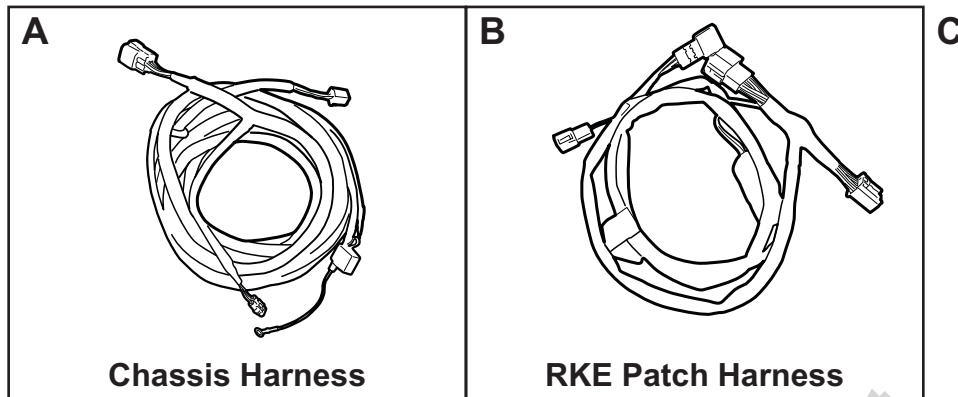


MITSUBISHI TRITON (RHD) 2020 +


General Notes

- Read through the fitting instructions before installation of accessory.
- Ensure all recyclable components and packaging are discarded and recycled following local recycling regulations.
- Safely store and protect any removed vehicle components.

Harnesses Supplied





Tools Used

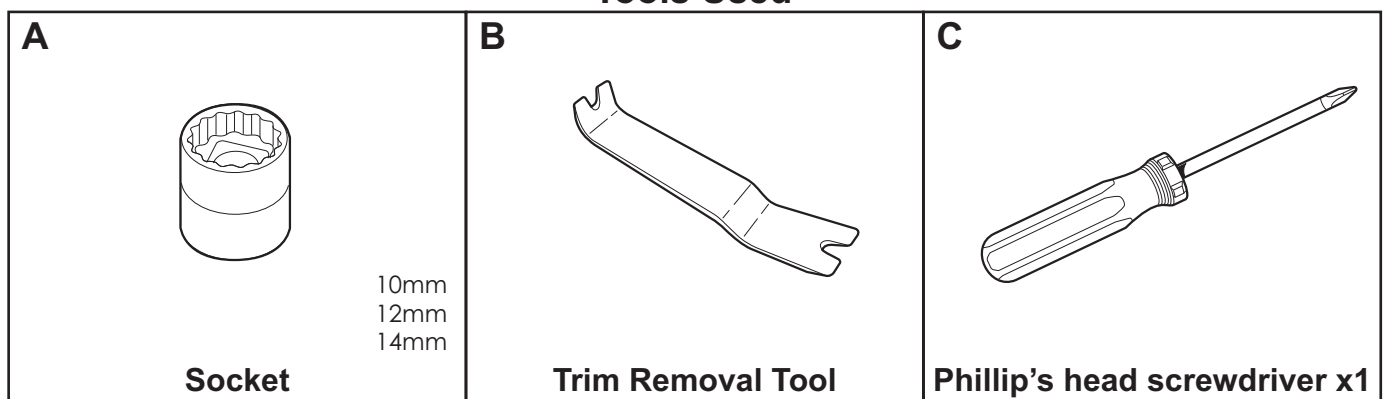


MITSUBISHI TRITON (RHD) 2020 +

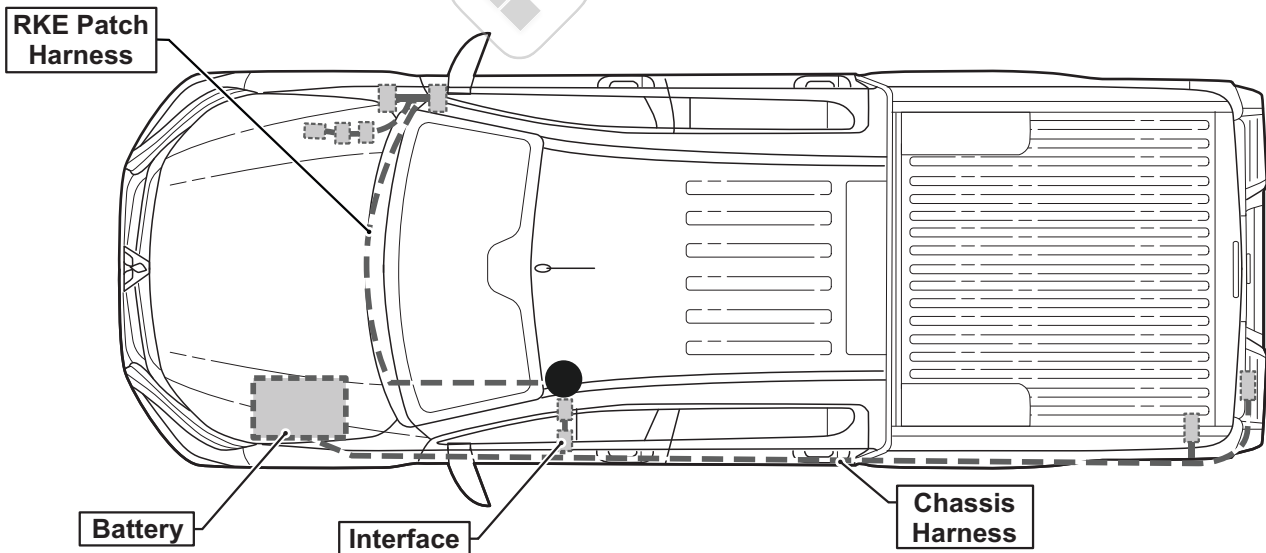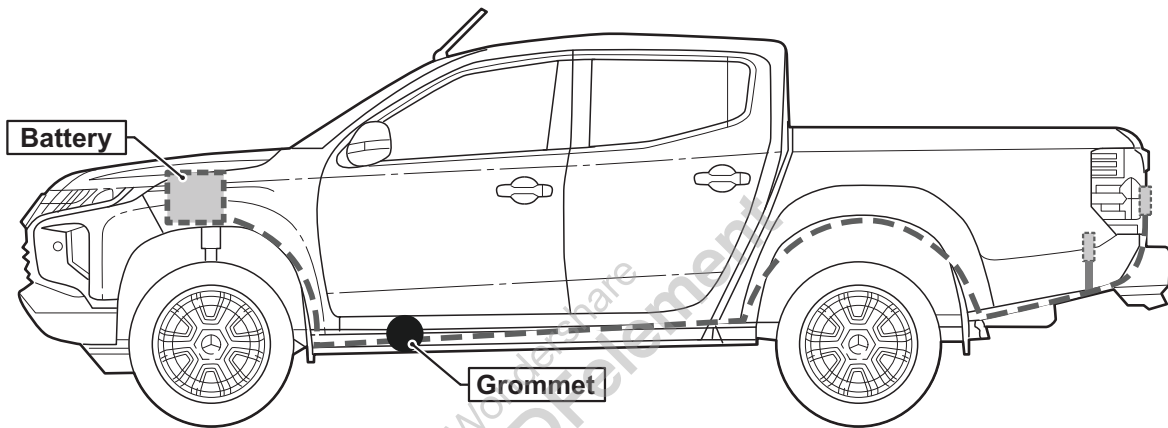
Harness Layout





MITSUBISHI TRITON (RHD) 2020 +

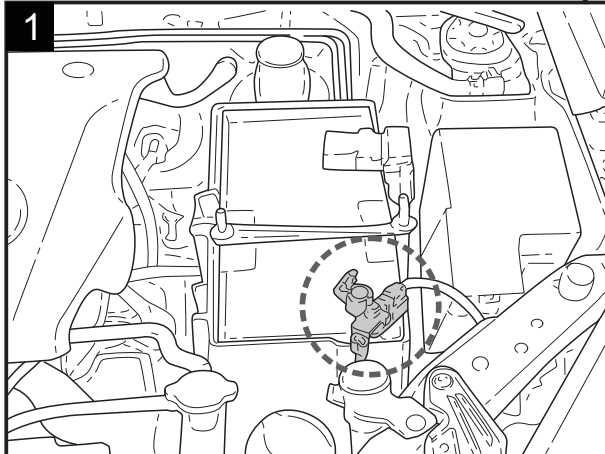

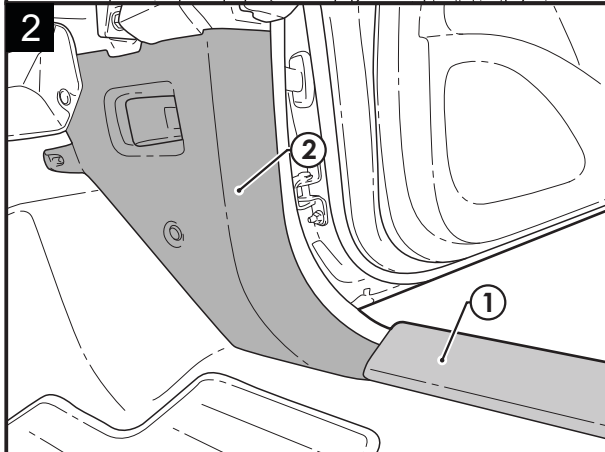
- Note down all clock and radio settings.
- In the Engine Bay disconnect the negative battery terminal.



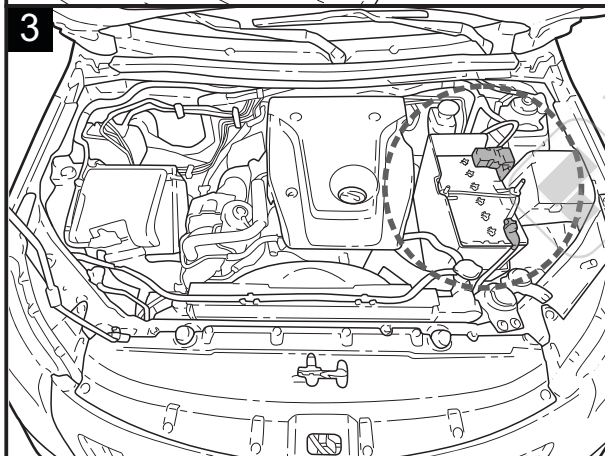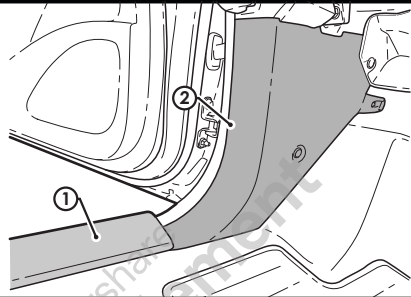- Inside the car, remove LHS & RHS scuff plate (1) and kick panel (2).








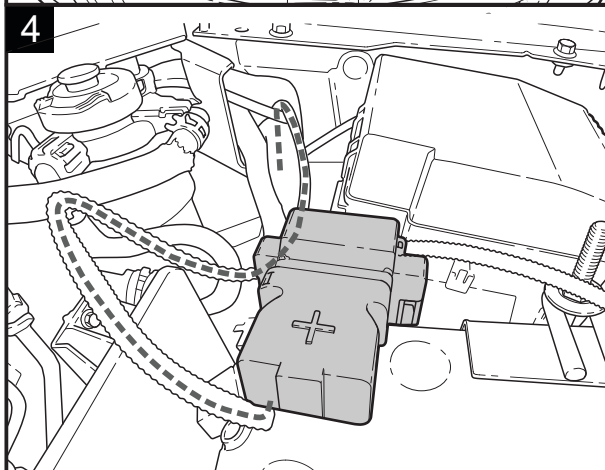- Connect the chassis harness positive to the positive and negative to the negative terminals of the battery.







- Route harness down the engine bay following existing vehicle harness to LHS rear of the car.

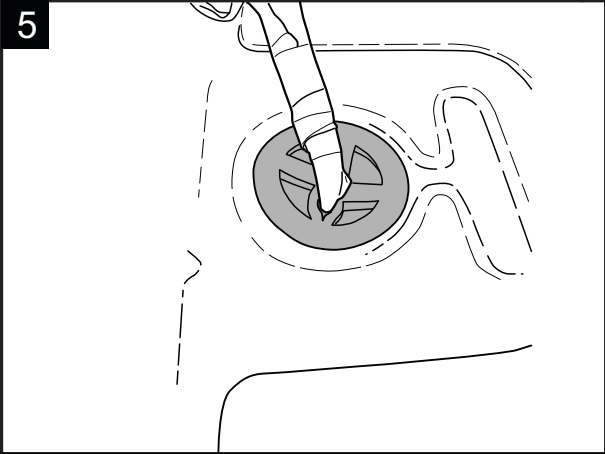
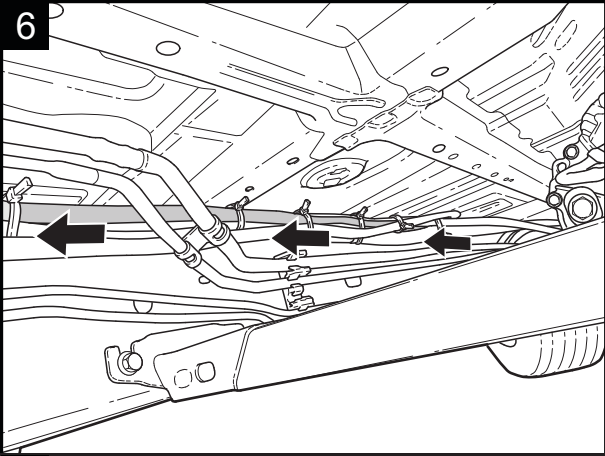
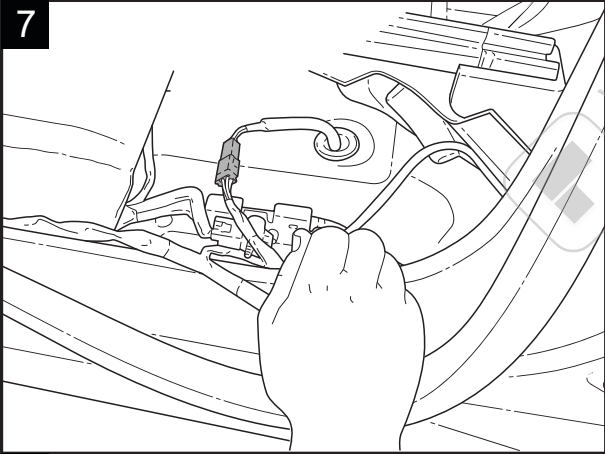
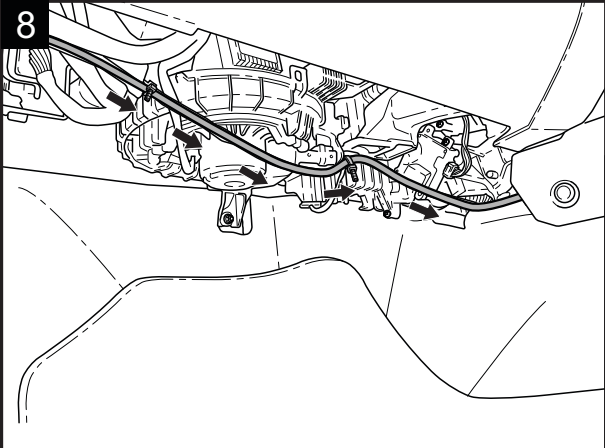
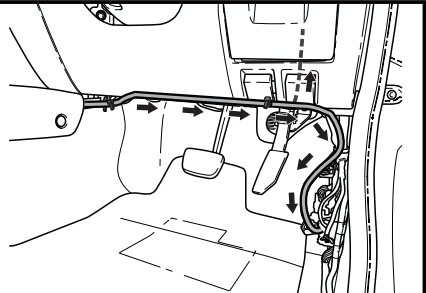
MITSUBISHI TRITON (RHD) 2020 +

 <p>5</p>	<ul style="list-style-type: none">Under the LHS passenger seat, remove the blanking grommet located under the carpet and feed in the grommet branch of chassis harness while making a watertight seal.
 <p>6</p>	<ul style="list-style-type: none">Continue routing the power harness to the LHS rear following the chassis rail securing it to the existing vehicle harness at every 300mm using supplied cable ties.
 <p>7</p>	<ul style="list-style-type: none">Route the 6-way male connector under the LHS passenger seat and connect it with already routed 6-way connector on the chassis harness.
 <p>8</p>	<ul style="list-style-type: none">Route the other end of the RKE Patch Harness above the LHS & RHS footwell and secure using supplied cable ties 

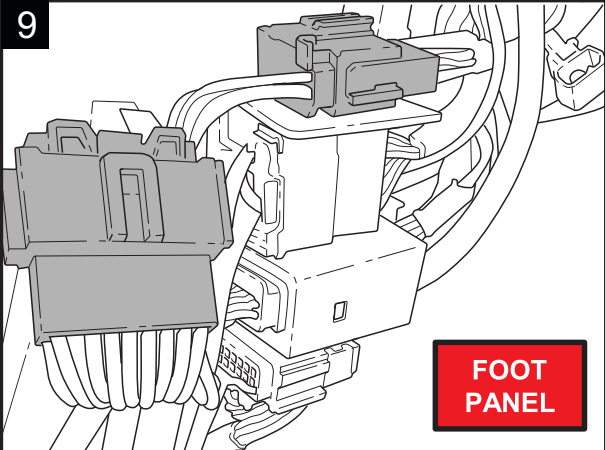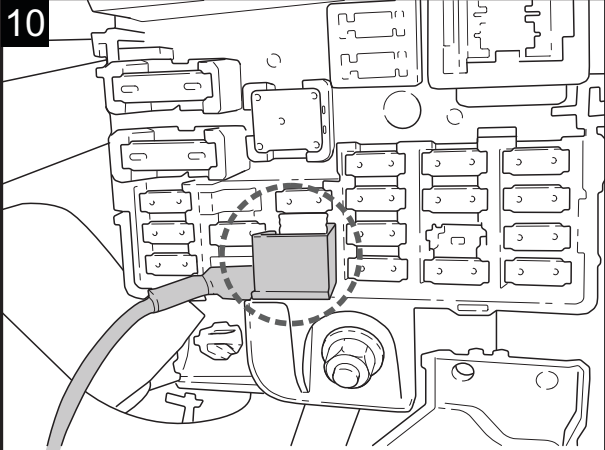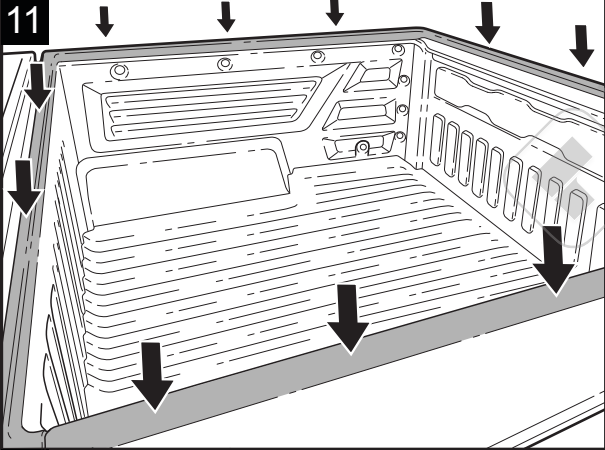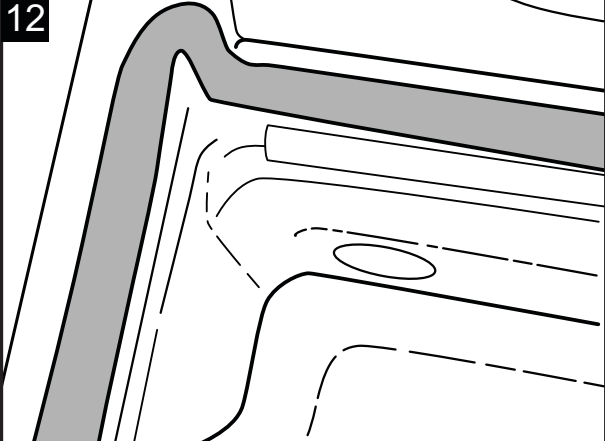MITSUBISHI TRITON (RHD) 2020 +


<p>9</p>  <p>FOOT PANEL</p>	<ul style="list-style-type: none">• Inside RHS kick panel area find 14-way connector and patch in RKE Patch Harness.
<p>10</p> 	<ul style="list-style-type: none">• Get access to the fuse box under the steering column and patch in the demister connector using the fuse patch provided.
<p>11</p> 	<ul style="list-style-type: none">• Degrease the bed rail.
<p>12</p> 	<ul style="list-style-type: none">• Apply mounting tape in one piece on the upper side of the bed rail.

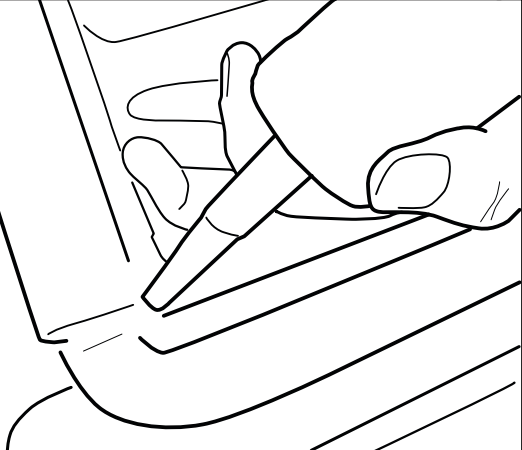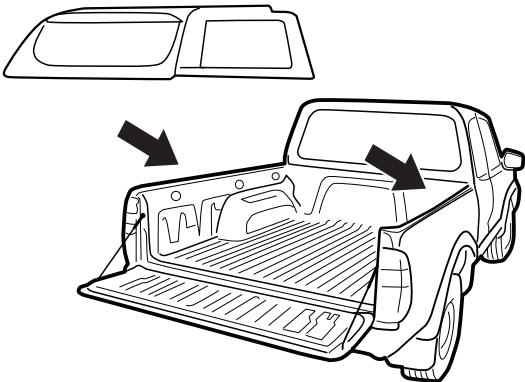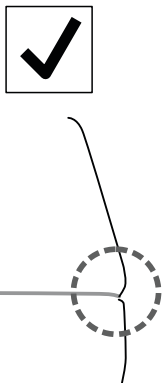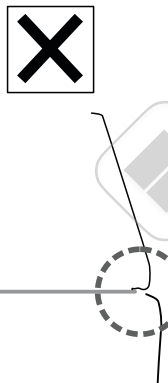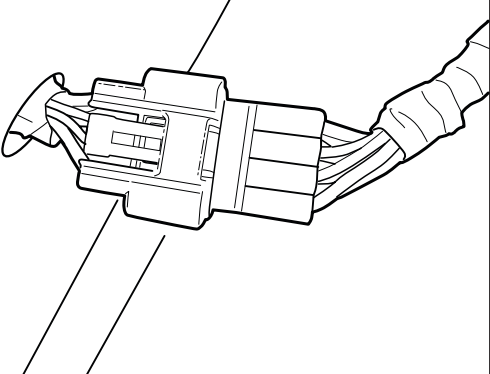MITSUBISHI TRITON (RHD) 2020 +

13 	<ul style="list-style-type: none">• Apply silicone in the connections of the front bed area.	
14 	<ul style="list-style-type: none">• Position with 4 people the hardtop with closed tailgate on the vehicle.	
15 		<ul style="list-style-type: none">• The rubber of the hardtop tailgate has to slightly touch the car tailgate.
16 	<ul style="list-style-type: none">• Connect the 8-way female canopy interfacing connector of chassis harness with 8-way male connector on the canopy harness.	


MITSUBISHI TRITON (RHD) 2020 +

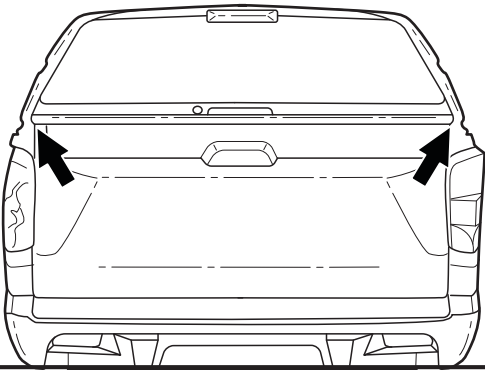17




- Close the tailgate of the hardtop and ensure that it fits nicely with the tailgate of the car.

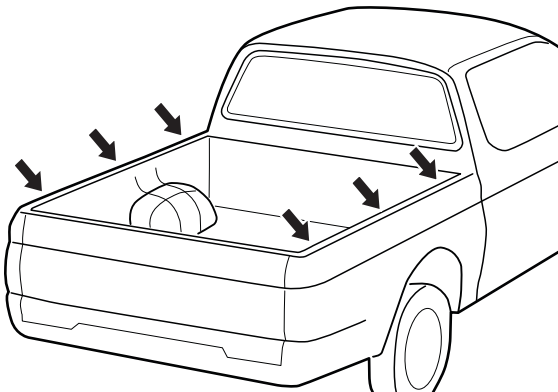18



- Secure the hardtop at the indicated places with the supplied clamps.

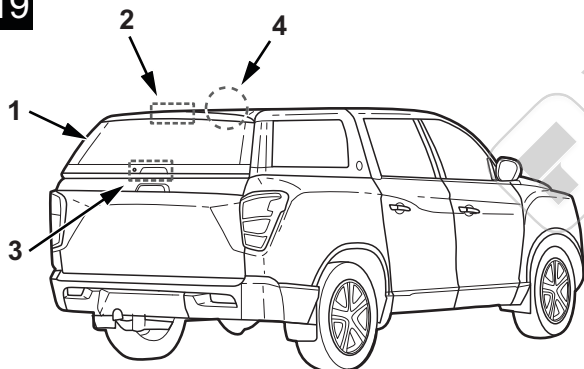19



- Test the following points:
 1. Rear window defroster
 2. Third brake light.
 3. Central locking system
 4. Interior light